



MS NOISE ENCLOSURES FOR BENCHTOP INSTRUMENTS (USB3-544052)

Product Overview


These products reduce the typical noise of an operating ultrasonic unit to a tolerable level (noise reduction by approx. - 20dBA).

It allows operation of ultrasonic units in sensitive working areas, such as in laboratories, medical practices, manufacturing...

Vapours are carried off by an exhaust fan to protect the enclosure against an accumulation of heat or humidity.

Key features :

- Transparent door offers viewing convenience while limiting noise to an acceptable level.
- Easy access to instrument (transparent door)
- Decibel lowered by 20 db(A)
- Opening for ultrasonic power supply and pipes placed at the back of the enclosure.
- Vapours are carried off by an exhaust fan to protect the enclosure against an accumulation of heat or humidity.
- Easy cleaning.

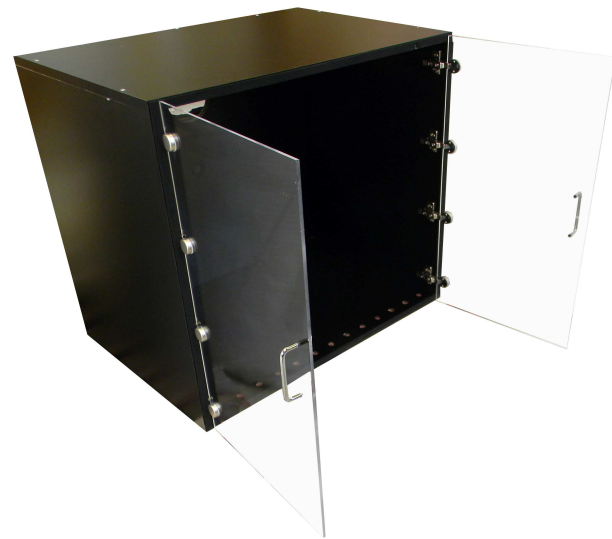



MS NOISE ENCLOSURES FOR BENCHTOP INSTRUMENTS (USB3-544052)

Detailed Technical specifications :

- Environment friendly noise adsorbing material, oil and water resistant.
- The noise reduction is in conformity with the European directive related to low voltage equipments (2006/95/EC) and electromagnetic compatibility (2004/108/EC).
- Compatible with 230V/50HZ or 110V/60HZ. delivered with a set of European, US, Japan, and UK plugs
- Power supply Csa, Ce and Ccc
- Electronic components are all compliant with RoHS directives (Restriction of Hazardous Substances Directive).

Dimensions	External (cm)	Internal (cm)
Depth	40	32
Width	54	44
Height	52	45
Weight :	Enclosure model (kg)	Enclosure model x (lbs)
Enclosure	20	44.1

Summary

Description	Part-number
Noise Enclosure	USB3-544052



Cooling fan and vapour extraction



Rear opening for pipe and cable